



## Description

The JOC303X, JOC304X, JOC306X and JOC308X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon random-phase photo triac in a plastic DIP4 package with different lead forming options.


## Features

- High isolation 5000 VRMS
- DC input with zero-cross photo triac output
- Operating temperature range - 40 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1

## Applications

- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals


## SCHEMATIC

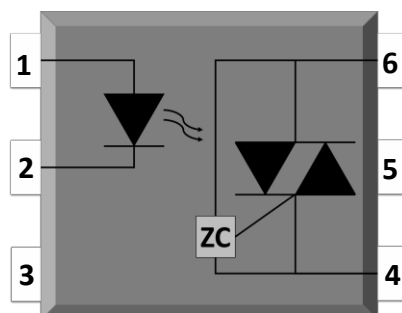

## PIN DEFINITION

|            |              |
|------------|--------------|
| 4. Anode   | 1. Terminal  |
| 5. NC      | 2. Substrate |
| 6. Cathode | 3. Terminal  |

## PACKAGE OUTLINE

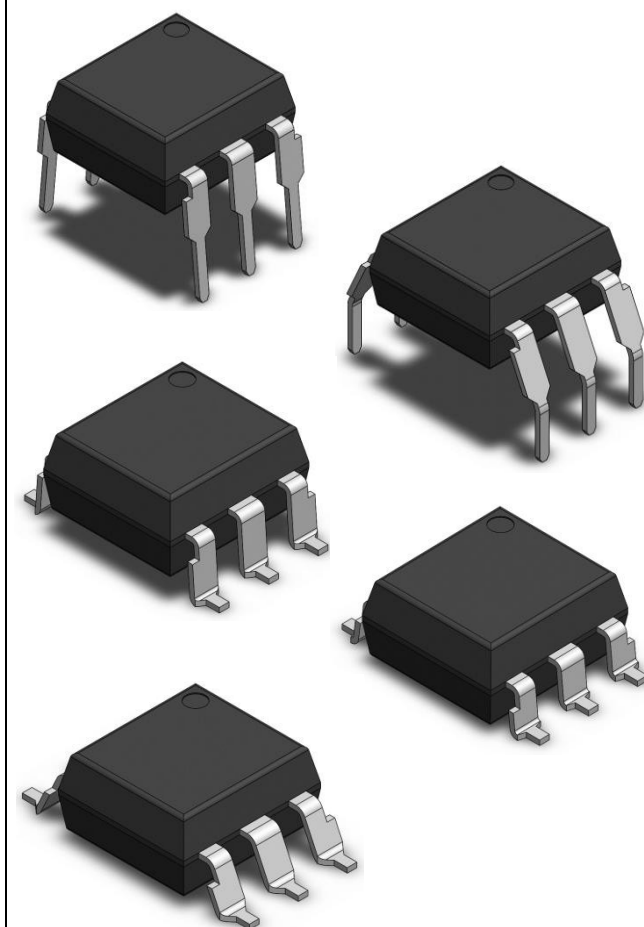


**ABSOLUTE MAXIMUM RATINGS**

| PARAMETER                                         | SYMBOL    | VALUE   | UNIT | NOTE |
|---------------------------------------------------|-----------|---------|------|------|
| INPUT                                             |           |         |      |      |
| Forward Current                                   | $I_F$     | 60      | mA   |      |
| Reverse Voltage                                   | $V_R$     | 6       | V    |      |
| Junction Temperature                              | $T_j$     | 125     | °C   |      |
| Input Power Dissipation                           | $P_I$     | 100     | mW   |      |
| OUTPUT                                            |           |         |      |      |
| Off-state Output Terminal Voltage                 | JOC303X   | 250     | V    |      |
|                                                   | JOC304X   | 400     |      |      |
|                                                   | JOC306X   | 600     |      |      |
|                                                   | JOC308X   | 800     |      |      |
| Peak Repetitive Surge Current<br>PW=100μs, 120pps | $I_{TSM}$ | 1       | A    |      |
| Junction Temperature                              | $T_j$     | 125     | °C   |      |
| Output Power Dissipation                          | $P_O$     | 300     | mW   |      |
| COMMON                                            |           |         |      |      |
| Total Power Dissipation                           | $P_{tot}$ | 400     | mW   |      |
| Isolation Voltage                                 | $V_{iso}$ | 5000    | Vrms | 1    |
| Operating Temperature                             | $T_{opr}$ | -40~100 | °C   |      |
| Storage Temperature                               | $T_{stg}$ | -55~125 | °C   |      |
| Soldering Temperature                             | $T_{sol}$ | 260     | °C   | 2    |

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds


**ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C**

| PARAMETER                                  | SYMBOL                          | MIN      | TYP    | MAX | UNIT             | TEST CONDITION                                 | NOTE |
|--------------------------------------------|---------------------------------|----------|--------|-----|------------------|------------------------------------------------|------|
| INPUT                                      |                                 |          |        |     |                  |                                                |      |
| Forward Voltage                            | $V_F$                           | -        | 1.24   | 1.4 | V                | $I_F=10\text{mA}$                              |      |
| Reverse Current                            | $I_R$                           | -        | -      | 10  | $\mu\text{A}$    | $V_R=6\text{V}$                                |      |
| Input Capacitance                          | $C_{in}$                        | -        | 8.5    | 250 | pF               | $V=0, f=1\text{kHz}$                           |      |
| OUTPUT                                     |                                 |          |        |     |                  |                                                |      |
| Peak Off-state Current, Either             | $I_{DRM}$                       | -        | -      | 100 | nA               | $V_{DRM}=\text{Rated } V_{DRM}$<br>$I_F=0$     | 3    |
| Peak On-state Current, Either              | $V_{TM}$                        | -        | 1.59   | 2.5 | V                | $I_{TM}=100\text{mA}$                          |      |
| Critical Rate of Rise of Off-state Voltage | $dV/dt$                         | 1000     | -      | -   | V/ $\mu\text{s}$ | $V_{PEAK}=\text{Rated } V_{DRM}$               | 4    |
| TRANSFER CHARACTERISTICS                   |                                 |          |        |     |                  |                                                |      |
| LED Trigger Current                        | JOC3031,JOC3041,JOC3061,JOC3081 | $I_{FT}$ | -      | -   | 15               | Terminal Voltage = 3V<br>$I_{TM}=100\text{mA}$ |      |
|                                            | JOC3032,JOC3042,JOC3062,JOC3082 |          | -      | -   | 10               |                                                |      |
|                                            | JOC3033,JOC3043,JOC3063,JOC3083 |          | -      | -   | 5                |                                                |      |
| Holding Current                            | $I_H$                           | -        | 237    | -   | $\mu\text{A}$    |                                                |      |
| Isolation Resistance                       | $R_{iso}$                       | $10^4$   | $10^5$ | -   | $\Omega$         | DC500V, 40 ~ 60% R.H.                          |      |
| Floating Capacitance                       | $C_{io}$                        | -        | 0.4    | -   | pF               | $V=0, f=1\text{MHz}$                           |      |


Note3. Test voltage must be applied within  $dV/dt$  rating.

Note4. Refer to Fig.15 & Fig.16




**CHARACTERISTIC CURVES**


**Fig.1 Forward Current vs. Ambient Temperature**

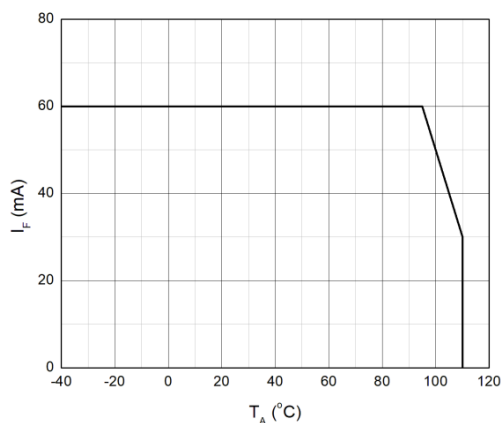


**Fig.2 On-state Terminal Current vs. Ambient Temperature**

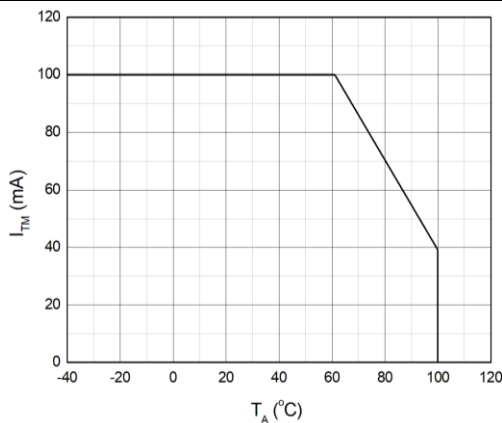


**Fig.3 Forward Current vs. Forward Voltage**

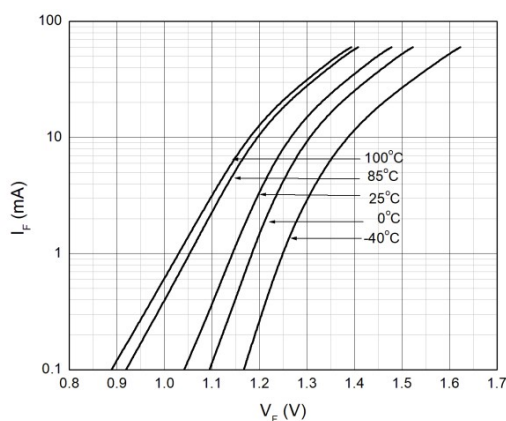


**Fig.4 Off-state Terminal Current vs. Ambient Temperature**

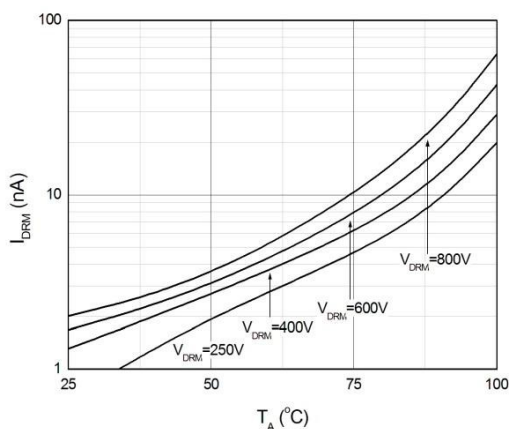

**Fig.5 Normalized Off-state Terminal Voltage vs. Ambient Temperature**

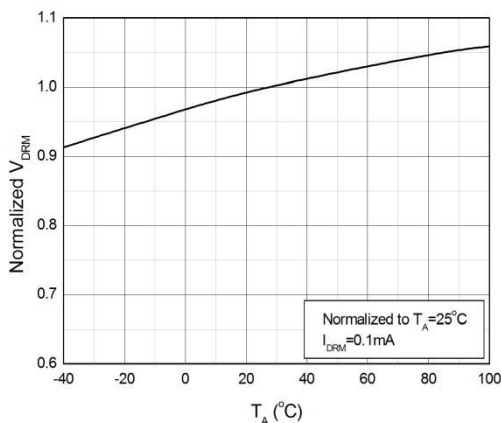


**Fig.6 Normalized Trigger Current vs. LED Trigger Pulse Width**

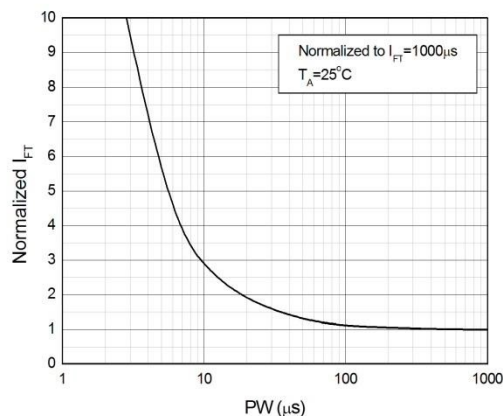




**CHARACTERISTIC CURVES**


**Fig.7 Normalized Trigger Current  
vs. Ambient Temperature**

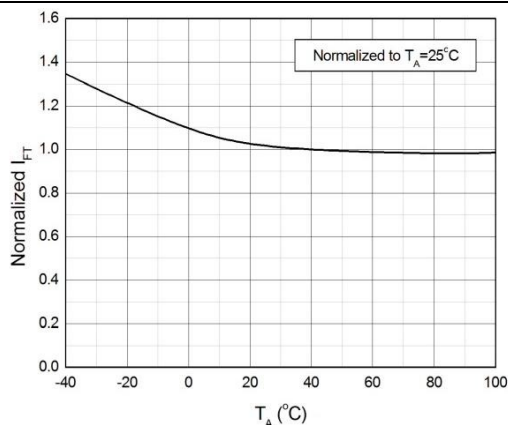


**Fig.8 On-state Terminal Voltage  
vs. Ambient Temperature**

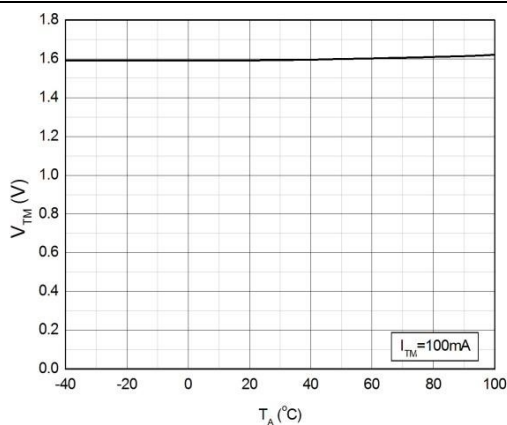


**Fig.9 On-state Terminal Voltage  
vs. On-state Terminal Current**

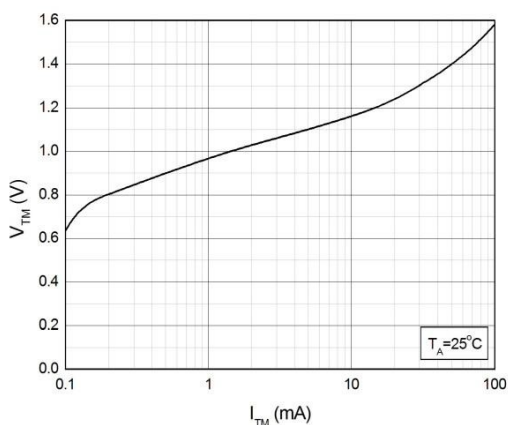


**Fig.10 Holding Current  
vs. Ambient Temperature**

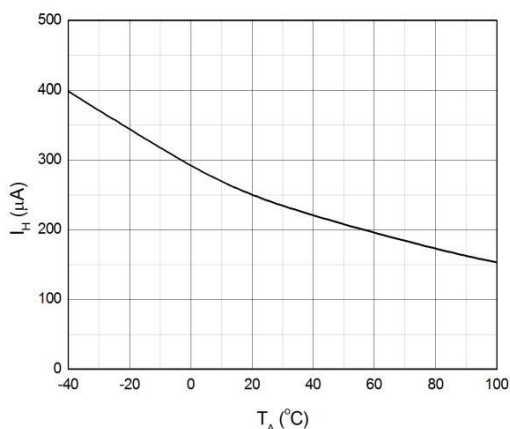

**Fig.11 Normalized Inhibit Voltage  
vs. Ambient Temperature**

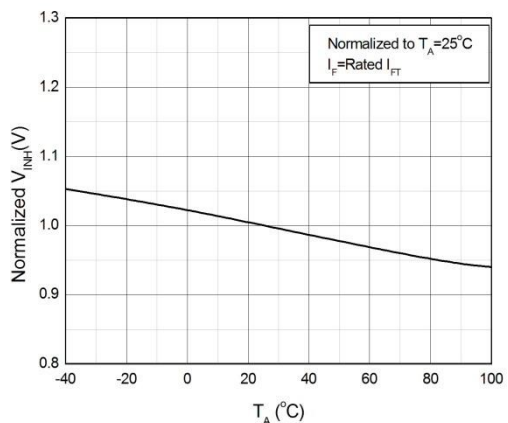


**Fig.12 Normalized Leakage in Inhibit State  
vs. Ambient Temperature**

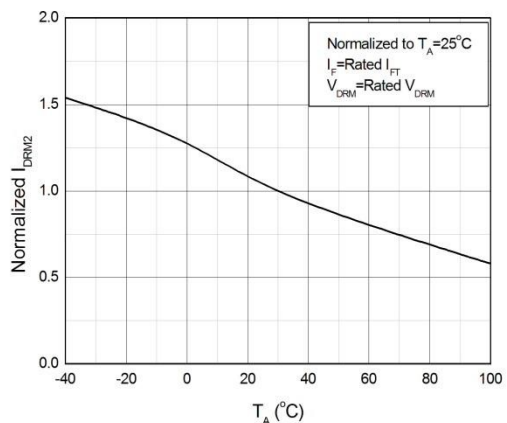




### CHARACTERISTIC CURVES

**Fig.13 Turn On Time vs. Forward Current**

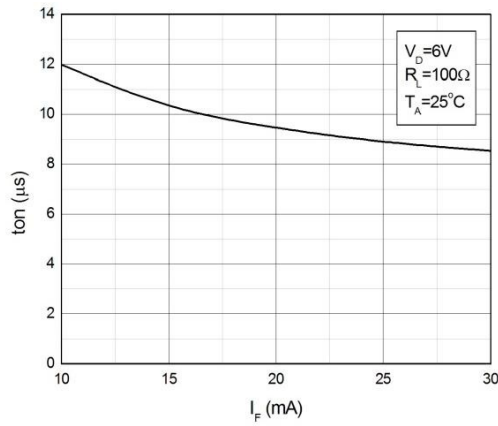


**Fig.14 Turn On Time vs. Ambient Temperature**

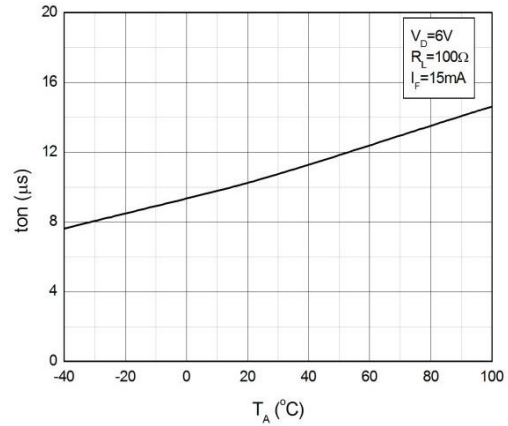


### TEST CIRCUITS


**Fig.15 Test Circuits of Turn On Time**

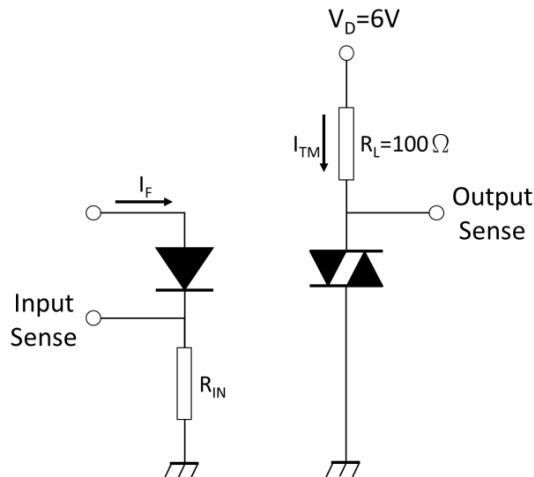


**Fig.16 Waveforms of Turn On Time**

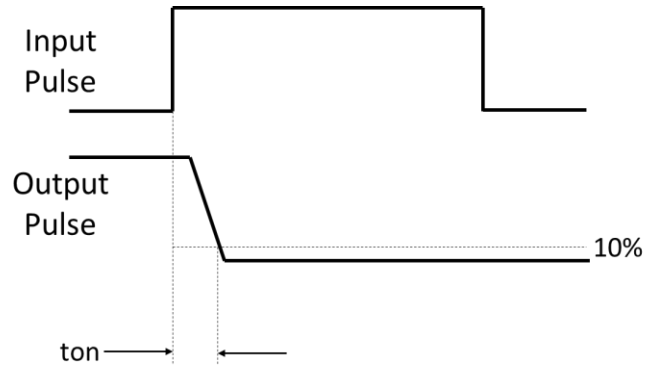

**Fig.17 Test Circuits of dV/dt**

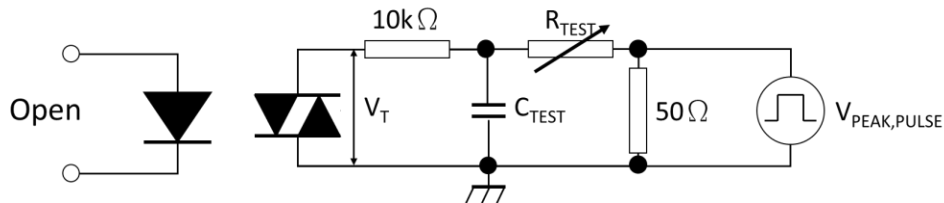


**Fig.18 Waveforms of dV/dt**

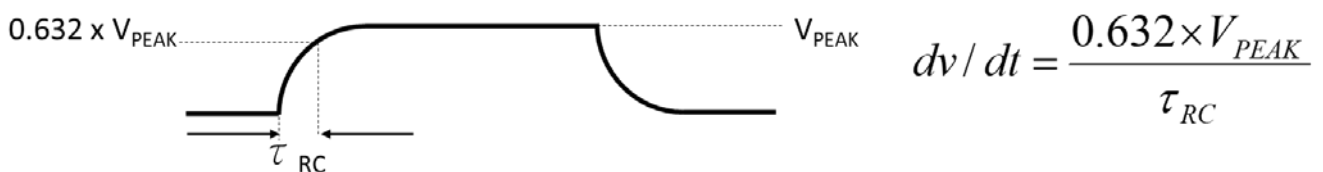


### PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)



**Standard DIP – Through Hole (DIP Type)**

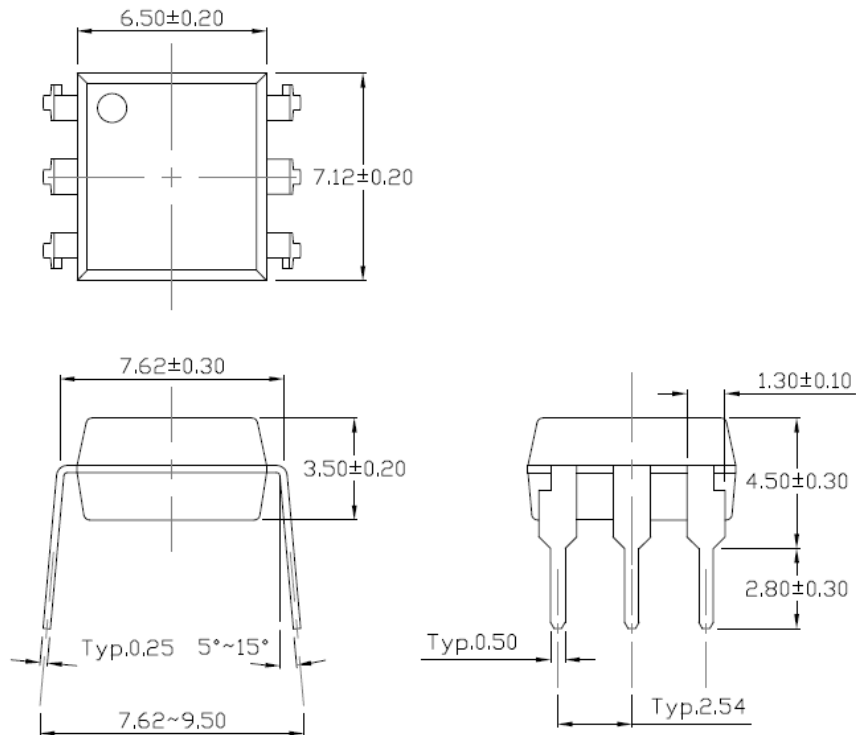


**Gullwing (400mil) Lead Forming – Through Hole (M Type)**

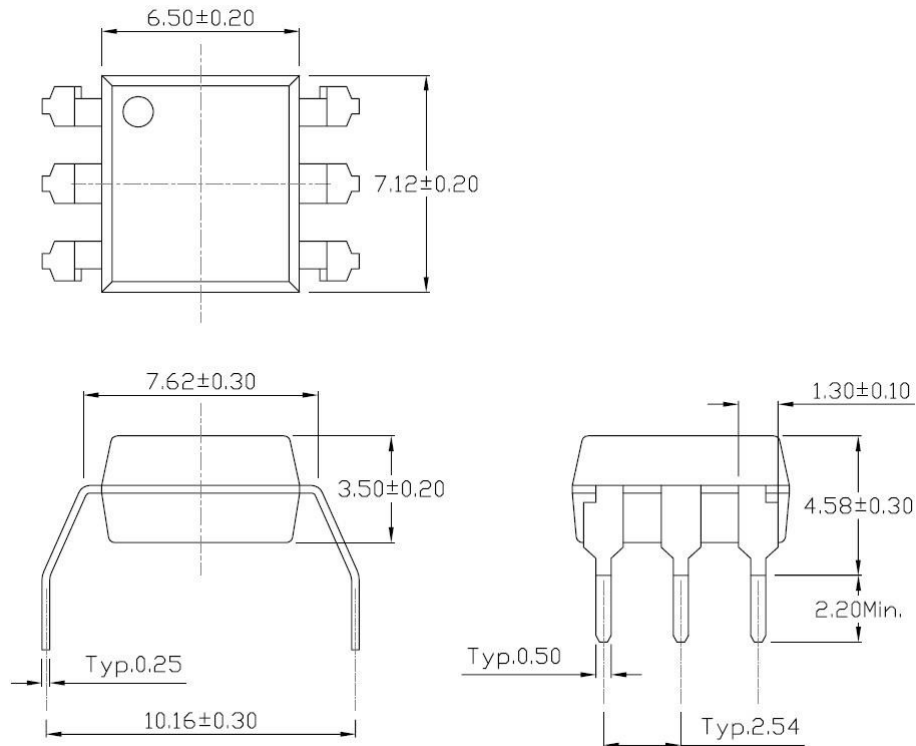


**PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)**

**Surface Mount Lead Forming (S Type)**

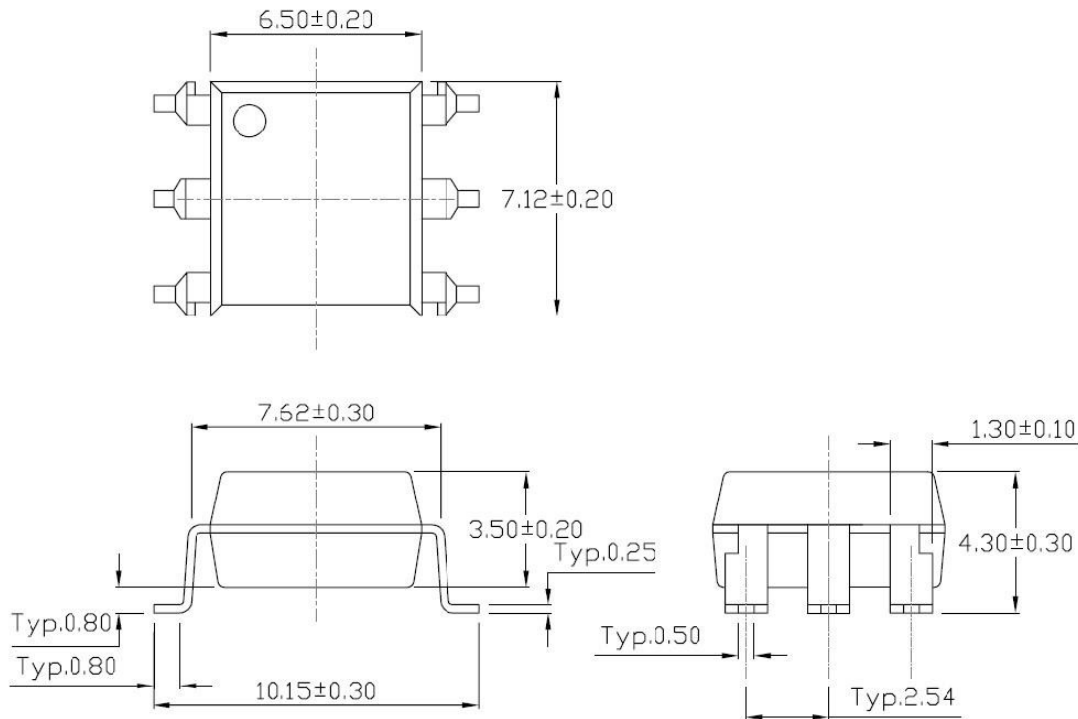


### Surface Mount (Low Profile) Lead Forming (SL Type)

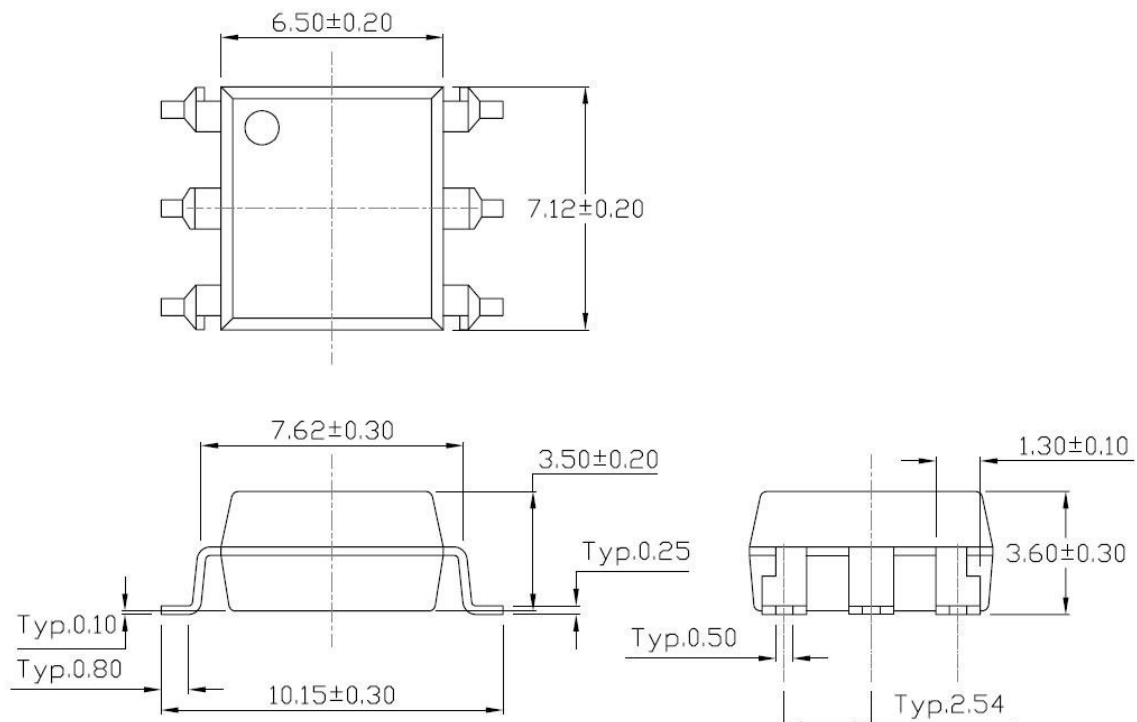


**RECOMMENDED SOLDER MASK** (Dimensions in mm unless otherwise stated)

### Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming

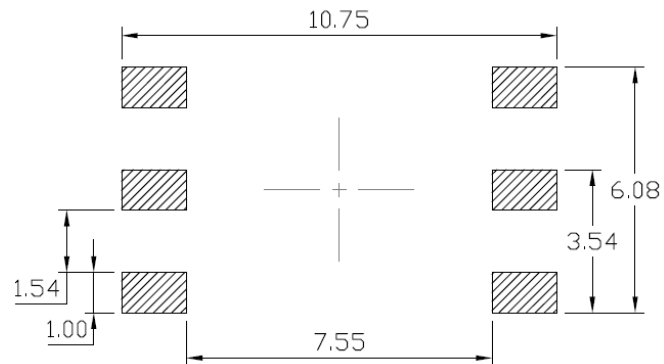




**Surface Mount (Gullwing) Lead Forming**

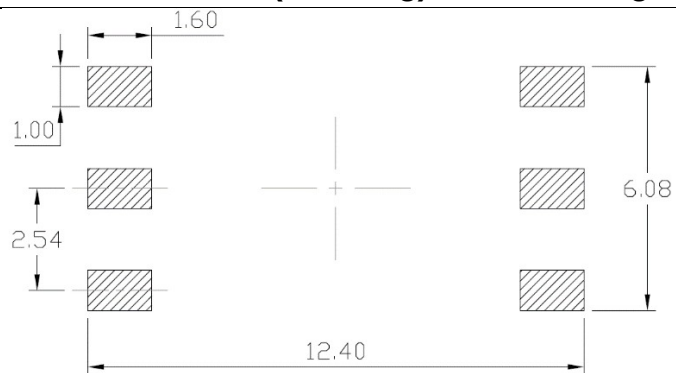






**TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)**

**Standard DIP**

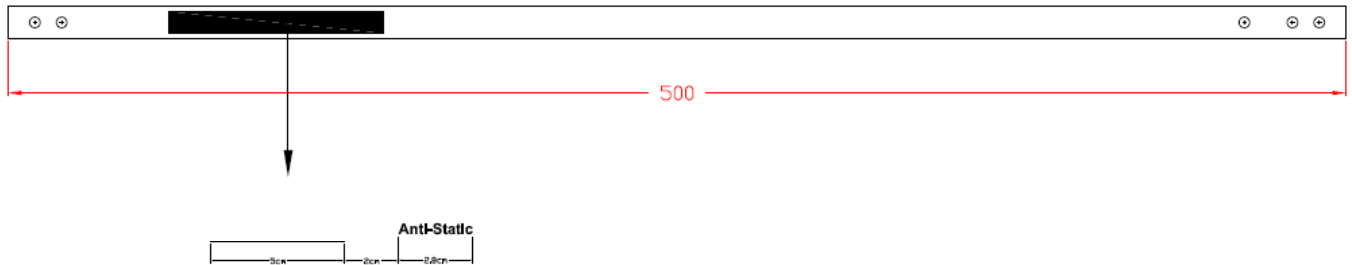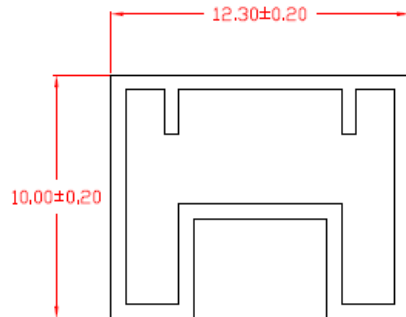

**Option M**

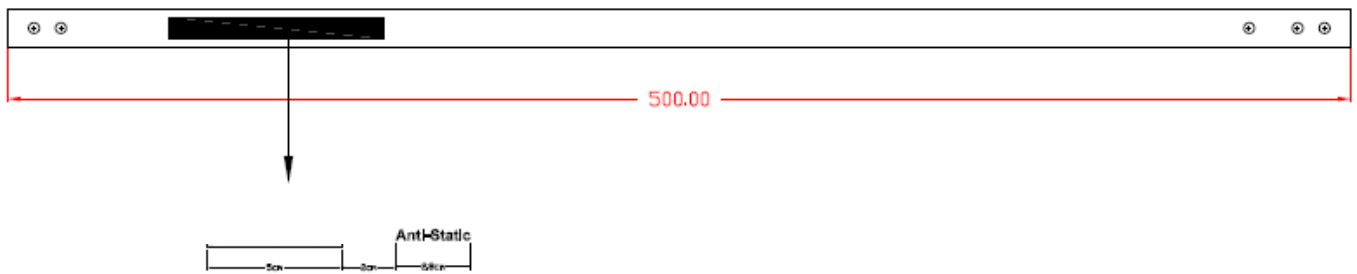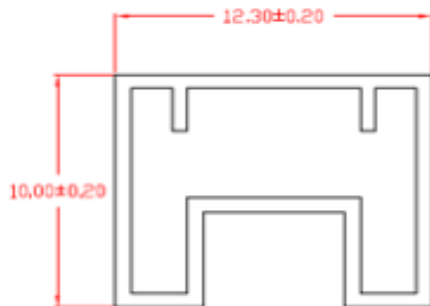




**BOX SPECIFICATIONS (Tube Type)**

**Inner Box**

Label



- L x W x H = 52.5cm x 10.7cm x 4.7cm


**Outer Box**

- L x W x H = 53.5cm x 23.5cm x 25.5cm



[www.jiwdz.com](http://www.jiwdz.com)


***JOC303X, JOC304X, JOC306X, JOC308X Series  
DIP6, DC Input, Zero-Cross Photo TRIAC Coupler***

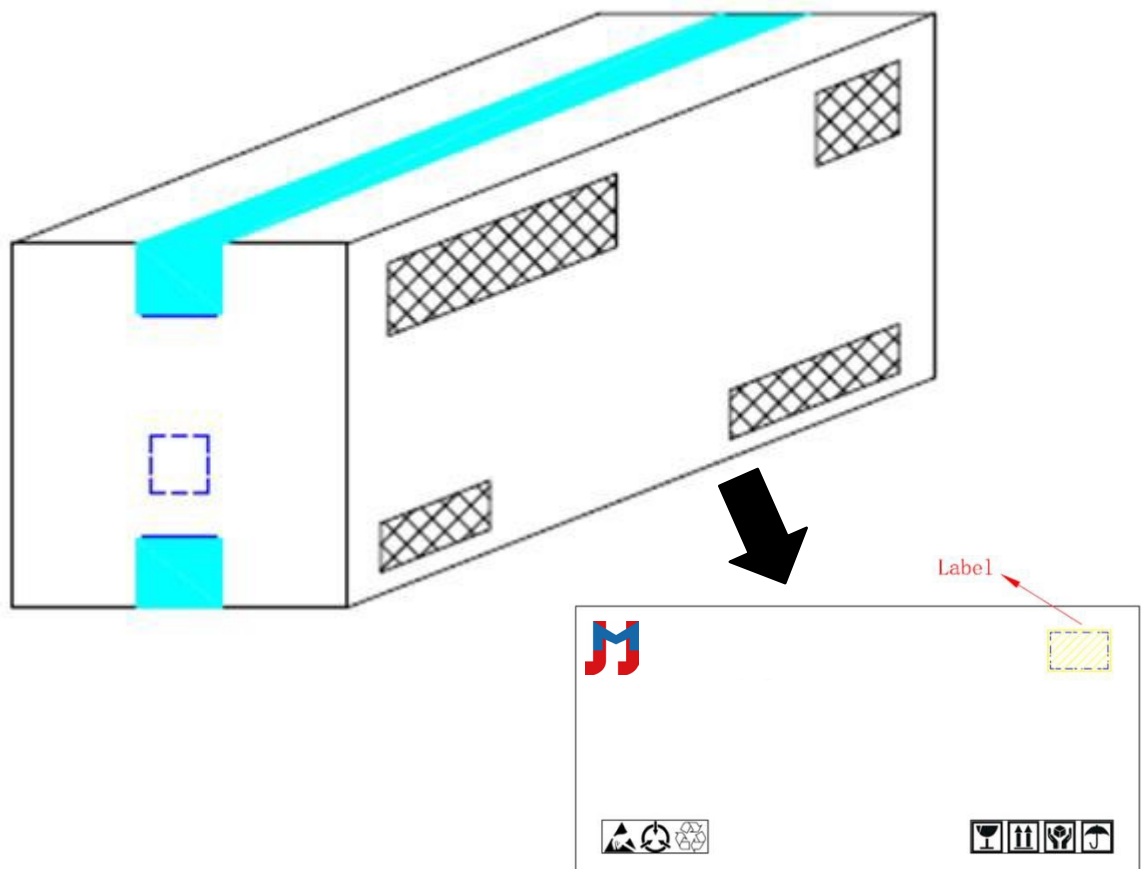




**CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)**

**Option S(T1) & SL(T1)**

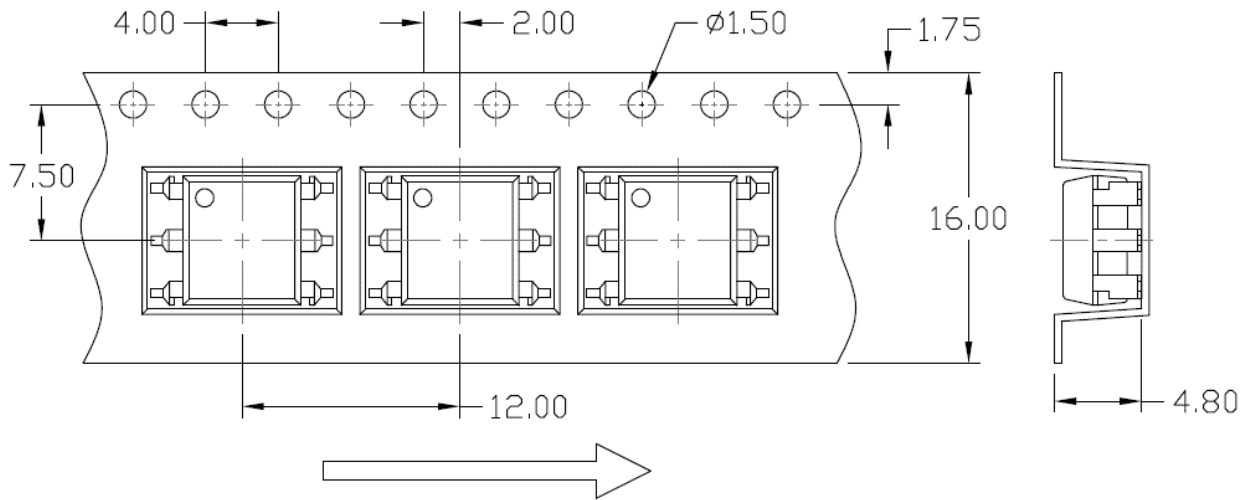


**Option S(T2) & SL(T2)**

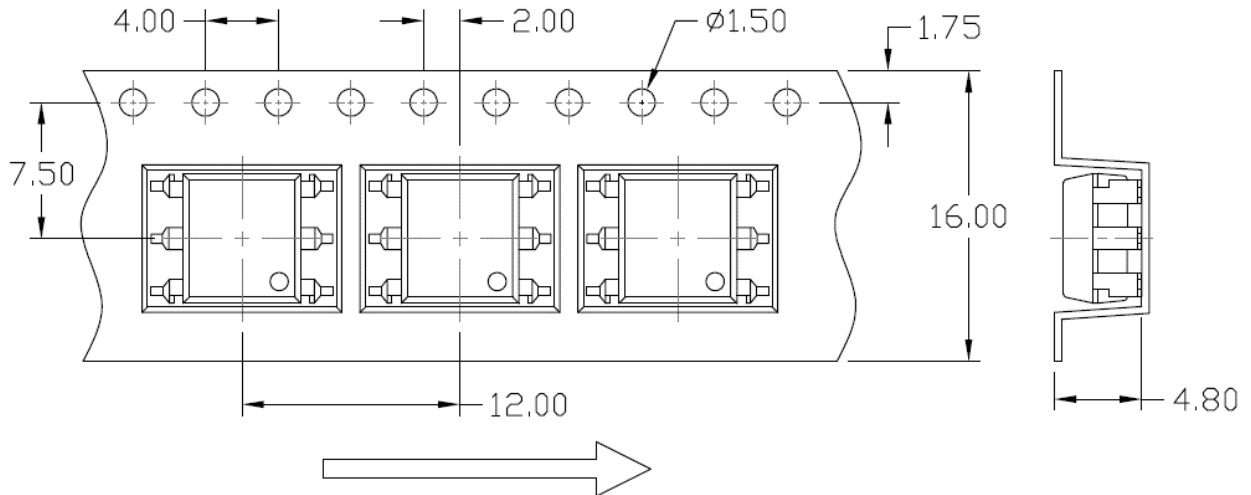



**REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)**


**Option S & Option SL**

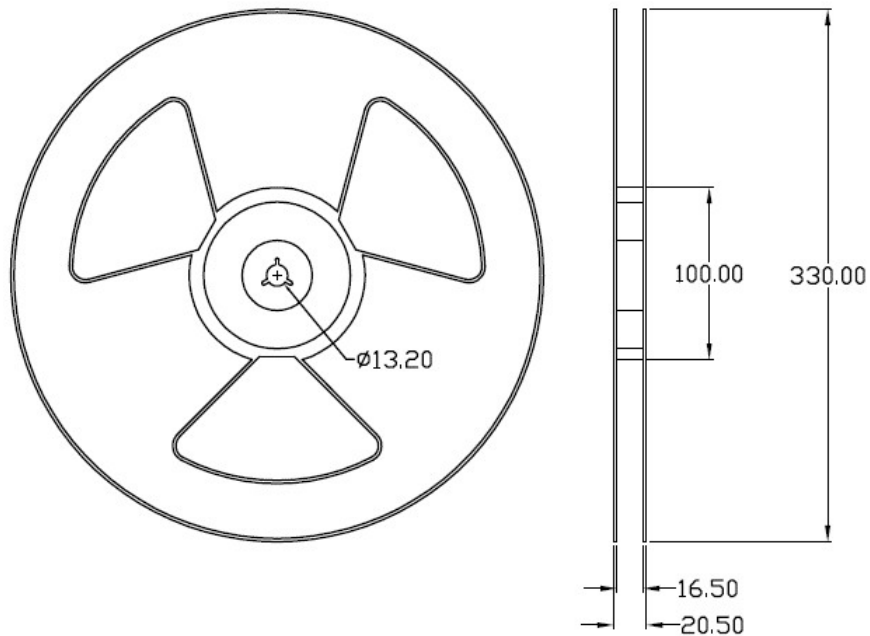




**BOX SPECIFICATIONS (Reel Type)**

**Inner Box**

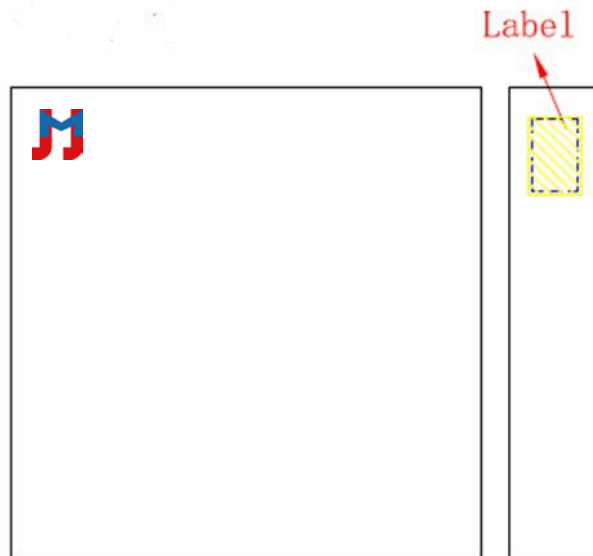


- L x W x H = 36cm x 36cm x 6.9cm

**Outer Box**

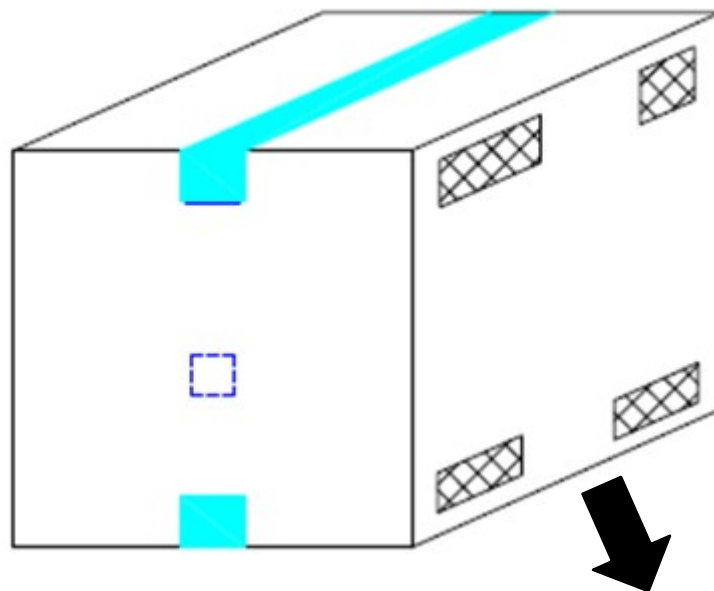


- L x W x H = 45cm x 38cm x 38cm

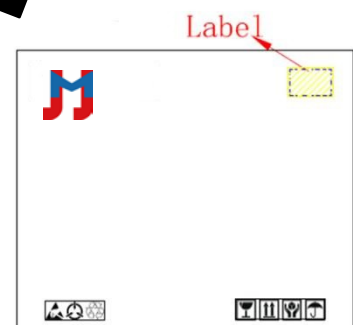



**ORDERING AND MARKING INFORMATION**

**MARKING INFORMATION**

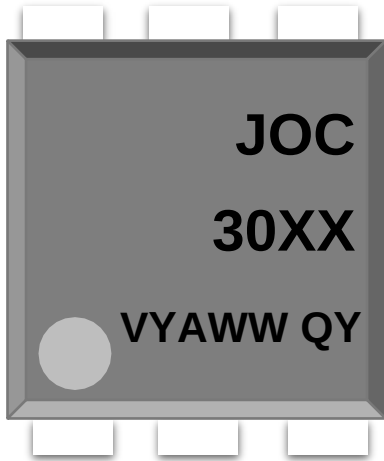

**JOC** : Company Abbr.  
**30XX** : Part Number & Rank  
**V** : VDE Option  
**Y** : Fiscal Year  
**A** : Manufacturing Code  
**WW** : Work Week  
**Q** : Package Code  
**Y** : Lead Form Option

**ORDERING INFORMATION**

**JOC30XX(Y)(Z)-GV**


JOC – Company Abbr.  
 30XX – Part Number  
 (31/32/33/41/42/43/61/62/63)  
 Y – Lead Form Option (M/S/SL/None)  
 Z – Tape and Reel Option (T1/T2)  
 G – Green Option (G or None)  
 V – VDE Option (V or None)

**LABEL INFORMATION**

Part No : XXXXXXXXXXXXXXXX Bin Code : X  
  
 Lot No : XXXXXXXXXXXX  
 Date Code : XXXX  
 Q'ty : XXXX pcs  
  

**Packing Quantity**

| Option | Quantity        | Quantity – Inner box | Quantity – Outer box               |
|--------|-----------------|----------------------|------------------------------------|
| None   | 50 Units/Tube   | 32 Tubes/Inner box   | 10 Inner box/Outer box = 16k Units |
| M      | 50 Units/Tube   | 28 Tubes/Inner box   | 10 Inner box/Outer box = 14k Units |
| S(T1)  | 1000 Units/Reel | 3 Reels/Inner box    | 5 Inner box/Outer box = 15k Units  |
| S(T2)  | 1000 Units/Reel | 3 Reels/Inner box    | 5 Inner box/Outer box = 15k Units  |
| SL(T1) | 1000 Units/Reel | 3 Reels/Inner box    | 5 Inner box/Outer box = 15k Units  |
| SL(T2) | 1000 Units/Reel | 3 Reels/Inner box    | 5 Inner box/Outer box = 15k Units  |

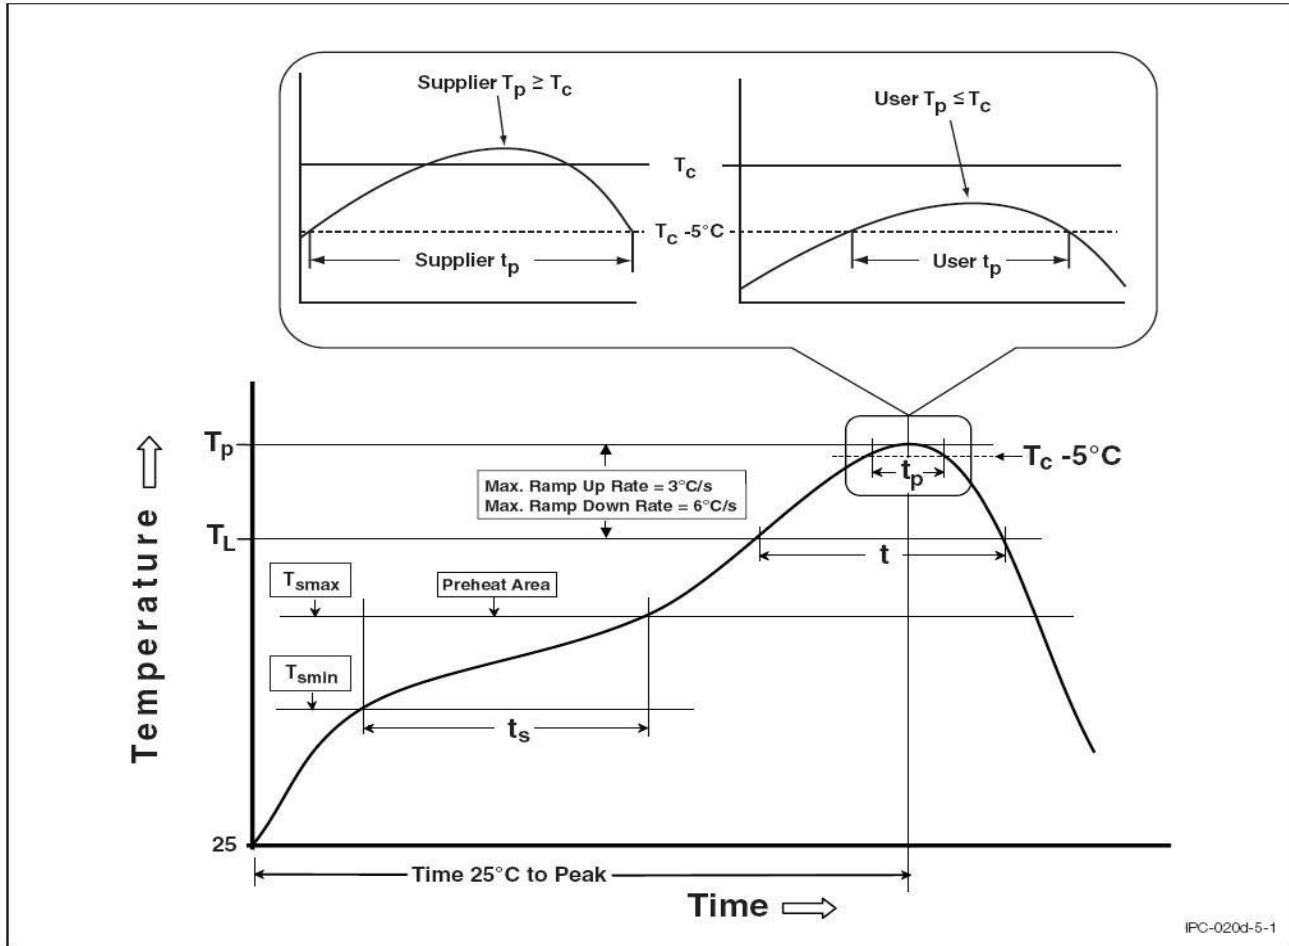**REFLOW INFORMATION****REFLOW PROFILE**

| Profile Feature                 | Sn-Pb Assembly Profile | Pb-Free Assembly Profile |
|---------------------------------|------------------------|--------------------------|
| Temperature Min. (Tsmin)        | 100                    | 150°C                    |
| Temperature Max. (Tsmax)        | 150                    | 200°C                    |
| Time (ts) from (Tsmin to Tsmax) | 60-120 seconds         | 60-120 seconds           |
| Ramp-up Rate (tL to tP)         | 3°C/second max.        | 3°C/second max.          |
| Liquidous Temperature (TL)      | 183°C                  | 217°C                    |
| Time (tL) Maintained Above (TL) | 60 – 150 seconds       | 60 – 150 seconds         |
| Peak Body Package Temperature   | 235°C +0°C / -5°C      | 260°C +0°C / -5°C        |
| Time (tP) within 5°C of 260°C   | 20 seconds             | 30 seconds               |
| Ramp-down Rate (TP to TL)       | 6°C/second max         | 6°C/second max           |
| Time 25°C to Peak Temperature   | 6 minutes max.         | 8 minutes max.           |



**DISCLAIMER**

- JIEJIE is continually improving the quality, reliability, function and design. JIEJIE reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- JIEJIE makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, JIEJIE disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact JIEJIE sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify JIEJIE terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.